


zencontrol

DALI-2 switch 6 datasheet

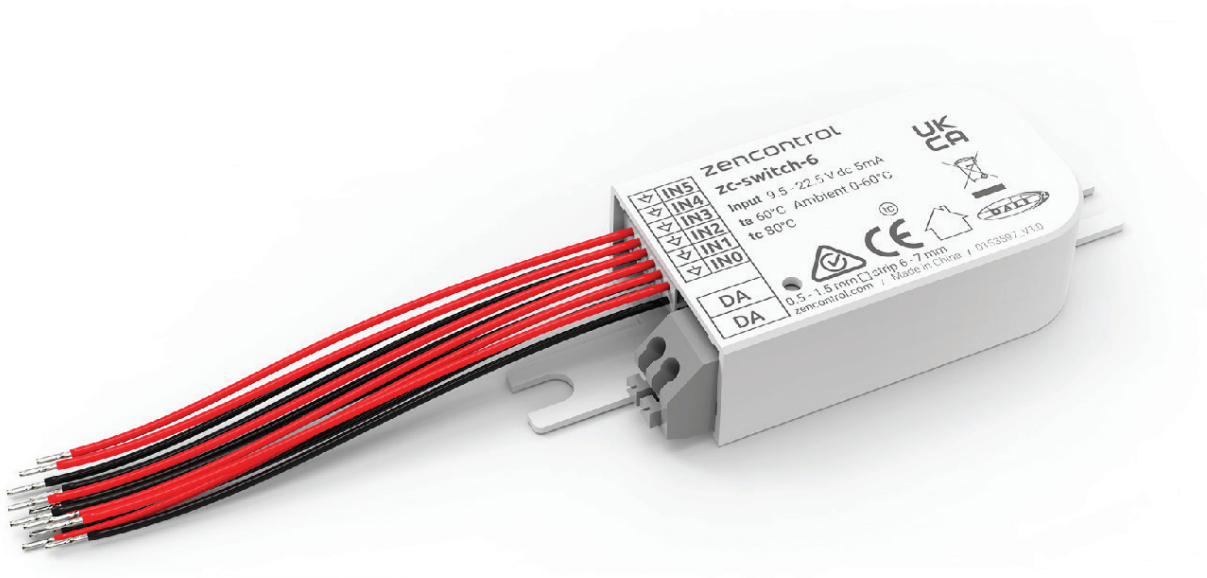

Features

- DALI-2 certified
- Multiple control devices per line
- Suitable for DALI-2 application controller
- Suitable for up to 16 devices per DALI line
- Suitable for momentary switch mechanisms
- Upgradeable to match changes in DALI standards
- Powered directly from DALI line, no separate supply required
- Supplied with flying leads for easy connection to multi gang plates
- Control scenes/groups/actions/events with a zencontrol control system



DALI-2
DALI version 2
compliant device



Cables
6 x 100 mm cables
supplied with switch



Small form factor
Small form factor for
mounting behind panels



Input
Contacts suitable for volt
free outputs / dry contacts

zencontrol

DALI-2 switch 6 datasheet



Product range


Order code	Description
zc-switch-6	DALI-2 switch module, 6 input

Features

- DALI-2 certified
- Compliant to IEC 62386-301
- Multiple control devices per line
- Suitable for DALI-2 application controller
- Suitable for up to 16 devices per DALI line
- Suitable for momentary switch mechanisms
- Upgradeable to match changes in DALI standards
- Small form factor for mounting behind switch panels
- Powered directly from DALI line, no separate supply required
- Supplied with flying leads for easy connection to multi gang plates
- Control scenes/groups/actions/events with a zencontrol control system

Dimensions

Dimensions W80 / H30 / D16 mm

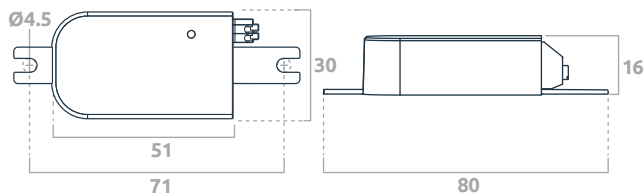

Specifications

Supply voltage	9.5 - 22.5 Vdc (supplied from DALI)
Control system	DALI-2
Supply current	5 mA
Input	6 floating dry contacts <i>Note: Any switch used shall be LV rated</i>
Wiring	0.5 - 1.5 mm ² Strip 6 - 7 mm
Operating temperature	0 to 60°C
Material	PC
Mounting	Inbuilt
Ingress protection	IP20
Compliance standards	IEC 61347-2-11 CISPR 15 IEC 62386-301 EMC-2004/108/EC LVD-2006/95/EC

Notice

- The switch must not be connected to any mains. It is powered directly from the DALI line.
- Input switches should be connected directly to the switch. They shall be volt-free contacts and must not be connected to mains.
- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.